



Revision Number: 005.0

Issue date: 10/20/2025


1. IDENTIFICATION

Product name: OSI PU DW FOAM PRO **IDH number:** 2971753
Product type/ Foam, 1-component with propellant gas
Recommended use:
Restriction of Use: None identified **Region:** United States
Company address:
 Henkel Corporation **Contact information:**
 One Henkel Way Telephone: +1 (860) 571-5100
 Rocky Hill, Connecticut 06067 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 MEDICAL EMERGENCY Phone: Poison Control Center
 1-877-671-4608 (toll free) or 1-303-592-1711
 TRANSPORT EMERGENCY Phone: CHEMTREC
 1-800-424-9300 (toll free) or 1-703-527-3887
 Internet: www.henkelna.com

2. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW	
DANGER:	H223 - FLAMMABLE AEROSOL. H229 - PRESSURIZED CONTAINER: MAY BURST IF HEATED. H315 - CAUSES SKIN IRRITATION. H317 - MAY CAUSE AN ALLERGIC SKIN REACTION. H319 - CAUSES SERIOUS EYE IRRITATION. H334 - MAY CAUSE ALLERGY OR ASTHMA SYMPTOMS OR BREATHING DIFFICULTIES IF INHALED. H372 - CAUSES DAMAGE TO ORGANS THROUGH PROLONGED OR REPEATED EXPOSURE.

HAZARD CLASS	HAZARD CATEGORY
AEROSOL	2
SKIN IRRITATION	2
EYE IRRITATION	2A
RESPIRATORY SENSITIZATION	1
SKIN SENSITIZATION	1
SPECIFIC TARGET ORGAN TOXICITY - REPEATED EXPOSURE	1

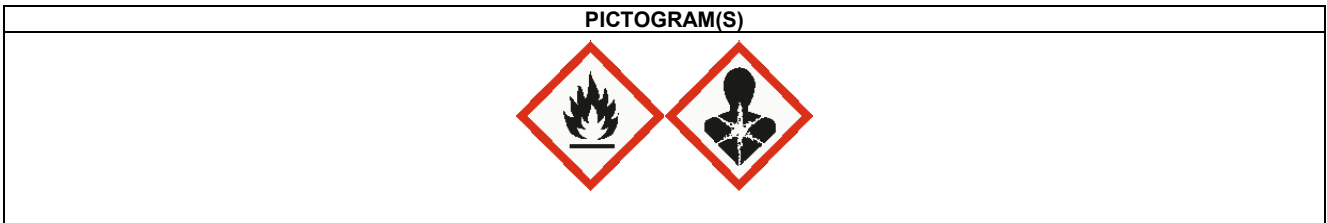

Precautionary Statements

Prevention: P210 - Keep away from heat, sparks, open flames, hot surfaces - no smoking.
 P211 - Do not spray on an open flame or other ignition source.
 P251 - Do not pierce or burn, even after use.
 P260 - Do not breathe dust or fumes.
 P264 - Wash affected area thoroughly after handling.
 P270 - Do not eat, drink or smoke when using this product.
 P272 - Contaminated work clothing should not be allowed out of the workplace.
 P280 - Wear protective gloves, eye protection, and face protection.
 P284 - [In case of inadequate ventilation] wear respiratory protection.
Response: P302+P352 - IF ON SKIN: Wash with plenty of water.

Storage:
Disposal:

P304+P340 - IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P333+P313 - If skin irritation or rash occurs: Get medical attention.
P337+P313 - If eye irritation persists: Get medical attention.
P342+P311 - If experiencing respiratory symptoms: Call a poison center or physician.
P362+P364 - Take off contaminated clothing and wash it before reuse.
P410+P412 - Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
P501 - Dispose of contents and/or container according to Federal, State/Provincial and local governmental regulations.

Other hazards Not available.

Classification complies with OSHA Hazard Communication Standard (29 CFR 1910.1200) and is consistent with the provisions of the United Nations Globally Harmonized System of Classification and Labeling of Chemicals (GHS).

See Section 11 for additional toxicological information.

3. COMPOSITION / INFORMATION ON INGREDIENTS

Hazardous Component(s)	CAS Number	Weight %*
Polymeric diphenylmethane diisocyanate	9016-87-9	10 - 30
Phosphorous oxychloride, reaction products with propylene oxide	1244733-77-4	10 - 30
dimethyl ether	115-10-6	5 - 10
Isobutane	75-28-5	5 - 10
propane	74-98-6	1 - 5

* Exact percentages may vary or are trade secret. Concentration range is provided to assist users in providing appropriate protections.

4. FIRST AID MEASURES

First Aid Measures by likely routes of exposure

Inhalation:	If inhaled, immediately remove the affected person to fresh air. If symptoms develop and persist, get medical attention.
Skin contact:	Immediately wash skin thoroughly with soap and water. If symptoms develop and persist, get medical attention.
Eye contact:	In case of contact with the eyes, rinse immediately with plenty of water for 15 minutes, and seek immediate medical attention.
Ingestion:	Get immediate medical attention. Do not induce vomiting.
Most important symptoms and effects (acute and delayed):	The most important known symptoms and effects, both acute and delayed, are described in Section 11: Toxicological Information.
Indication of any immediate medical attention / special treatment needed:	Treat symptomatically and supportively.

5. FIRE FIGHTING MEASURES

Extinguishing media:	Water spray (fog), foam, dry chemical or carbon dioxide.
Improper extinguishing agents:	Not available.
Special firefighting procedures:	Wear full protective clothing. Wear self-contained breathing apparatus.
Unusual fire or explosion hazards:	May liberate large quantities of dense, foul-smelling smoke which may contain unidentified toxic gasses.

Hazardous combustion products:

Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Oxides of nitrogen.

6. ACCIDENTAL RELEASE MEASURES

Use personal protection recommended in Section 8, isolate the hazard area and deny entry to unnecessary and unprotected personnel.

Environmental precautions:

Do not allow product to enter sewer or waterways.

Clean-up methods:

Remove all sources of ignition. Ensure adequate ventilation. Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust). Scrape up spilled material and place in a closed container for disposal. Refer to Section 8 "Exposure Controls / Personal Protection" prior to clean up.

7. HANDLING AND STORAGE

Handling:

Avoid contact with eyes, skin and clothing. Wash thoroughly after handling. Avoid breathing vapors or mists of this product. Ground and bond all equipment as required (when transferring products). For industrial use only. Do not take internally.

Storage:

Keep container tightly closed and in a cool, well-ventilated place away from incompatible materials.

For information on product shelf life, please review labels on container or check the Technical Data Sheet.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Employers should complete an assessment of all workplaces to determine the need for, and selection of, proper exposure controls and protective equipment for each task performed.

Hazardous Component(s)	ACGIH TLV	OSHA PEL	AIHA WEEL	OTHER
Polymeric diphenylmethane diisocyanate	0.005 ppm TWA	None	None	None
dimethyl ether	None	None	1,000 ppm (1,880 mg/m ³) TWA	None
Isobutane	D: Simple asphyxiant, EX: Explosion hazard 1,000 ppm STEL	None	None	None
propane	D: Simple asphyxiant, EX: Explosion hazard (Simple asphyxiant.)	1,000 ppm (1,800 mg/m ³) PEL	None	None
Hazardous Component(s)	ACGIH TLV	OSHA PEL	AIHA WEEL	OTHER
Polymeric diphenylmethane diisocyanate	0.005 ppm TWA	None	None	None
dimethyl ether	None	None	1,000 ppm (1,880 mg/m ³) TWA	None
Isobutane	D: Simple asphyxiant, EX: Explosion hazard 1,000 ppm STEL	None	None	None
propane	D: Simple asphyxiant, EX: Explosion hazard (Simple asphyxiant.)	1,000 ppm (1,800 mg/m ³) PEL	None	None

Engineering controls:

Provide local and general exhaust ventilation to effectively remove and prevent buildup of any vapors or mists generated from the handling of this product.

Respiratory protection:

If ventilation is not sufficient to effectively prevent buildup of aerosols, mists or vapors, appropriate NIOSH/MSHA respiratory protection must be provided.

Eye/face protection:

Wear chemical goggles; face shield (if splashing is possible).

Skin protection:

Wear impervious gloves for prolonged contact. Use of impervious apron and boots are recommended.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state:	Aerosolaerosol
Color:	Off whiteLight brown
Odor:	EtherCharacteristic
Odor threshold:	Not available.
pH:	Not applicable, Product reacts with water.
Vapor pressure:	0.5 MPa (20 °C (68°F)) Referring to liquefied propellant at 20 °C
Boiling point/range:	-42 °C (-43.6 °F)Values referring to propellant
Melting point/ range:	Not applicable, Product is a liquid
Density/Relative density:	Not available.
Relative vapor density:	1.7 20 °C
Flash point:	Not applicable
Flammable/Explosive limits - lower:	1.5 %
Flammable/Explosive limits - upper:	Not available.
Autoignition temperature:	Not available.
Flammability:	Flammable aerosol.
Evaporation rate:	Not available.
Solubility:	Not soluble, reacts with water to cure and release CO2. Water
Partition coefficient n-octanol/water (logarithmic value):	Not available.
VOC content:	17.4 %; 178 g/l (by weight, calculated using CARB method; g/L less water, less exempts calculated using SCAQMD method)
Dynamic viscosity:	Not available.
Kinematic viscosity:	> 20.5 mm2/s
Particle characteristics:	Not applicable, Product is a liquid
Decomposition temperature:	Not available.

10. STABILITY AND REACTIVITY

Stability:	Stable under normal conditions of storage and use.Stable under normal conditions of storage and use.
Hazardous reactions:	None under normal processing. None under normal processing.
Hazardous decomposition products:	Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Oxides of nitrogen. Upon decomposition, this product emits carbon monoxide, carbon dioxide and/or low molecular weight hydrocarbons. Oxides of nitrogen.
Incompatible materials:	This product may react with strong acids or oxidizing agents. This product may react with strong acids or oxidizing agents.
Reactivity:	Not available.
Conditions to avoid:	Keep away from heat, ignition sources and incompatible materials. Keep away from heat, ignition sources and incompatible materials.

11. TOXICOLOGICAL INFORMATION

Likely routes of exposure:	Skin, Inhalation, Eyes, Ingestion
-----------------------------------	-----------------------------------

Potential Health Effects/Symptoms

Inhalation: May cause respiratory tract irritation.
Skin contact: This product may cause irritation to the skin.
Eye contact: This product may cause irritation to the eyes.
Ingestion: Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea.

Hazardous Component(s)	LD50s and LC50s
Polymeric diphenylmethane diisocyanate	None
Phosphorous oxychloride, reaction products with propylene oxide	None
dimethyl ether	Inhalation LC50 (Rat, 4 h) = 164000 ppm Inhalation LC50 (Rat, 4 h) = > 20000 ppm
Isobutane	None
propane	Inhalation LC50 (Rat, 4 h) = > 13023 ppm Inhalation LC50 (Rat, 4 h) = > 13023 ppm

Hazardous Component(s)	Immediate Health Effects	Delayed Health Effects	Chronic Health Effects
Polymeric diphenylmethane diisocyanate	Irritant	Allergen	Kidney Liver Respiratory
Phosphorous oxychloride, reaction products with propylene oxide			
dimethyl ether	Irritant		Central nervous system
Isobutane			Cardiac Central nervous system Lung
propane	Irritant		Cardiac Central nervous system

Hazardous Component(s)	NTP Carcinogen	IARC Carcinogen	OSHA Carcinogen (Specifically Regulated)
Polymeric diphenylmethane diisocyanate	No	No	No
Phosphorous oxychloride, reaction products with propylene oxide	No	No	No
dimethyl ether	No	No	No
Isobutane	No	No	No
propane	No	No	No

12. ECOLOGICAL INFORMATION

Ecological information: Not available.

13. DISPOSAL CONSIDERATIONS

Information provided is for unused product only.

Recommended method of disposal: Dispose of according to Federal, State and local governmental regulations.

14. TRANSPORT INFORMATION

The transport information provided in this section only applies to the material/formulation itself, and is not specific to any packaging.

U.S. Department of Transportation Ground (49 CFR)

Proper shipping name: Aerosols
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None

International Air Transportation (ICAO/IATA)

Proper shipping name: Aerosols, flammable
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None

Water Transportation (IMO/IMDG)
Proper shipping name: AEROSOLS
Hazard class or division: 2.1
Identification number: UN 1950
Packing group: None

15. REGULATORY INFORMATION

United States Regulatory Information

TSCA 8 (b) Inventory Status: All components are listed as active or are exempt from listing on the Toxic Substances Control Act (TSCA) inventory.

TSCA 12 (b) Export Notification: None above reporting de minimis

CERCLA/SARA Section 302 EHS: Propylene oxide (CAS# 75-56-9).
CERCLA/SARA Section 311/312: Please refer to the GHS classification in Section 2
CERCLA/SARA Section 313: This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act of 1986 (40 CFR 372). Polymeric diphenylmethane diisocyanate (CAS# 9016-87-9).

California Proposition 65: This product contains a chemical known in the State of California to cause cancer. This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

Canada Regulatory Information

CEPA DSL/NDSL Status: Contains one or more components listed on the Non-Domestic Substances List. All other components are listed on or are exempt from listing on the Domestic Substances List. Components listed on the NDSL must be tracked by all Canadian Importers of Record as required by Environment Canada. They may be imported into Canada in limited quantities. Please contact Regulatory Affairs for additional details.

16. OTHER INFORMATION

This safety data sheet contains changes from the previous version in sections: This Safety Data Sheet contains changes from the previous version in Section(s): 9, 15

Prepared by: Regulatory Affairs

Issue date: 10/20/2025

DISCLAIMER: The data contained herein are furnished for information only and are believed to be reliable. However, Henkel Corporation and its affiliates ("Henkel") does not assume responsibility for any results obtained by persons over whose methods Henkel has no control. It is the user's responsibility to determine the suitability of Henkel's products or any production methods mentioned herein for a particular purpose, and to adopt such precautions as may be advisable for the protection of property and persons against any hazards that may be involved in the handling and use of any Henkel's products. In light of the foregoing, Henkel specifically disclaims all warranties, express or implied, including warranties of merchantability and fitness for a particular purpose, arising from sale or use of Henkel's products. Henkel further disclaims any liability for consequential or incidental damages of any kind, including lost profits.

This Safety Data Sheet has been generated based on OSHA Hazard Communication Standard (29 CFR 1910.1200) and provides information in accordance with U.S. federal law only. No warranty or representation of any kind is given with respect to the substantive or export laws of any other jurisdiction or country. Please confirm that the information provided herein conforms to the substantive export or other law of any other jurisdiction prior to export. Please contact Henkel Product Safety and Regulatory Affairs for additional assistance.